


### Semi-finished product range

- Cast and moulded parts
- Elastomer spring elements
- Snow plow blades
- Clutch packages
- Protective jaws
- PUR metal compounds
- Concrete-wear parts
- Wheels, rollers and mills

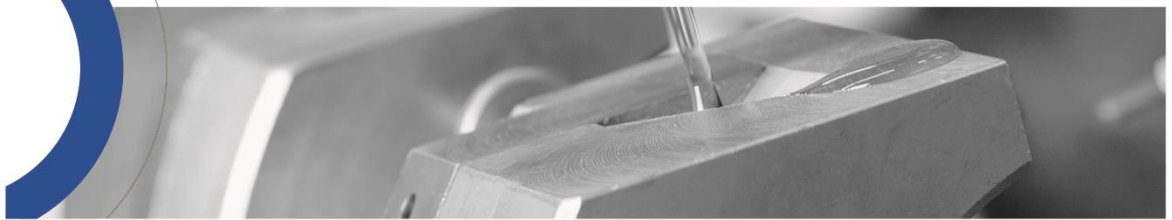

## Range of semi-finished products / plates

<b>Materials</b>	Original Vulkollan® D15, Polyurethane D44, with hydrolysis protection
<b>Hardness ranges</b>	70 +5-10 (72 +-5), 82 (80)+-5, 90 +-5, 96 +4-5 Shore A
<b>Colors</b>	Standard color for Vulkollan® D15 is basically "natural", for polyurethane D44 "brown". Coloring in black, white, red, blue, yellow and green is possible as special production. Other color shades, e.g. according to RAL register after consultation.

### Dimensions and thicknesses

#### Standard formats I

Thickness	Length x width	Thickness	Length x width
0.5 mm	2.0 x 0.5 m	10 mm	2.0 x 1.0 m
1.0 mm	2.0 x 1.0 m	15 mm	2.0 x 1.0 m
1.5 mm	2.0 x 1.5 m	20 mm	2.0 x 1.0 m
2.0 mm	2.0 x 1.0 m	20 mm	2.0 x 1.0 m
2.5 mm	2.0 x 1.0 m	25 mm	1.0 x 1.0 m
3.0 mm	2.0 x 1.0 m	30 mm	1.0 x 1.0 m
4.0 mm	2.0 x 1.0 m	35 mm	1.0 x 1.0 m
5.0 mm	2.0 x 1.0 m	40 mm	1.0 x 1.0 m
6.0 mm	2.0 x 1.0 m	50 mm	1.0 x 0.5 m
8.0 mm	2.0 x 1.0 m		

#### Standard formats II

Thickness	Length x width	Thickness	Length x width
1.0 mm	3.0 x 1.0 m	5.0 mm	3.0 x 1.0 m
1.5 mm	3.0 x 1.0 m	6.0 mm	3.0 x 1.0 m
2.0 mm	3.0 x 1.0 m	8.0 mm	3.0 x 1.0 m
2.5 mm	3.0 x 1.0 m	10 mm	3.0 x 1.0 m
3.0 mm	3.0 x 1.0 m	12 mm	3.0 x 1.0 m
4.0 mm	3.0 x 1.0 m	15 mm	3.0 x 1.0 m

Max. width	Thickness from 1.0 mm to max. 130 kg unit weight	Thickness from 10 mm to max. 130 kg unit weight
Up to 1,000 mm	Max. length 7,000 mm without seam	
Up to 1,380 mm	Max. length 4,000 mm without seam	
Up to 2,000 mm		Max. length 4,000 mm without seam

Vulkollan® is a registered trademark of Bayer AG.

**On request we also manufacture other thicknesses, such as e.g. 3.5 / 7 or 13 mm**

For sales prices, other dimensions; other material qualities as well as other colors and hardnesses, please contact our sales team.